



CURVED PARTITIONS MICRA

SINGLE & DOUBLE GLAZED

The curved corner is chosen by the architects not only because of its graceful shapes, but also because of the **space saving** and thus the increase in the throughput width.

We offer **2 basic options** - aluminum bent or steel welded profile.


“Special requirements train our technicians and forces them to look for new and better solutions.”

Pavel Matyáš | Business Manager LIKO-S



SAVE SPACE

Curved partitions help save space and increase the throughput where a normal corner would not come out.

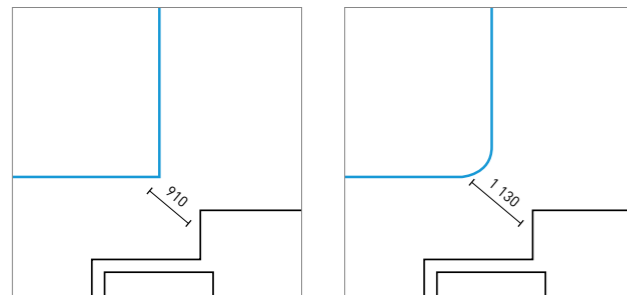


CURVED ALUMINIUM PROFILES FOR SYSTEM MICRA I

Aluminium profiles: P47, P40
Surface treatment: RAL swatch ELOX

STANDARD ARC DIMENSIONS:

Glass thickness: 8, 10, 12 and 16 mm
Length: 1 500 mm
/ in the case of a longer arc, the joint will be visible
Min. radius: tempered glass R450 mm
laminated glass R150 mm
Max. radius: 1 500 mm

PROFILES CROSS SECTION

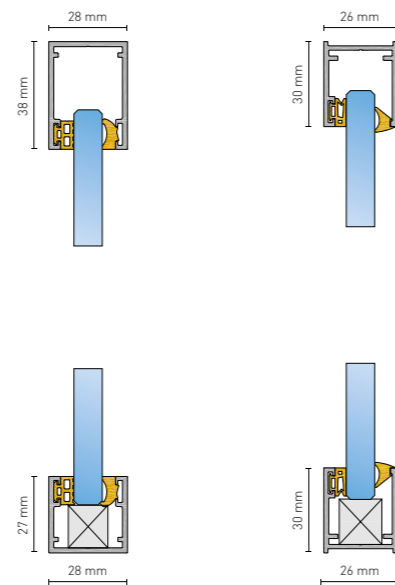


WELDED STEEL PROFILES FOR SYSTEM MICRA I AND MICRA II

Materiál: sheet metal th. 2 - 4 mm
Surface treatment: RAL swatch

STANDARD ARC DIMENSIONS:

Glass thickness: 8, 10, 12 a 16 mm
Length: 3 000 mm
/ in the case of a longer arc, the joint will be visible
Min. radius: tempered glass R450 mm
laminated glass R150 mm
Max. radius: 2 200 mm

PROFILES CROSS SECTION

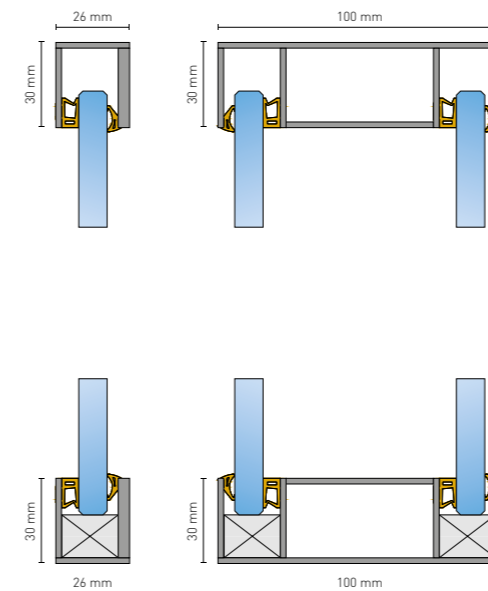

BENT GLASS


TEMPERED GLASS:

Thickness: 4 - 19 mm
Max. dimensions: 2 000 x 3 600 mm
Min. radius: R450 - 500 mm
Max. radius: no limit

LAMINATED GLASS:

Type: VSG 33.1 - 88.1 (resp. 33.2 - 88.2)
Max. dimensions: 3 700 x 2 700 mm
Min. dimensions: R150 - 300 mm
Max. radius: no limit

DEFINING BENT GLASS

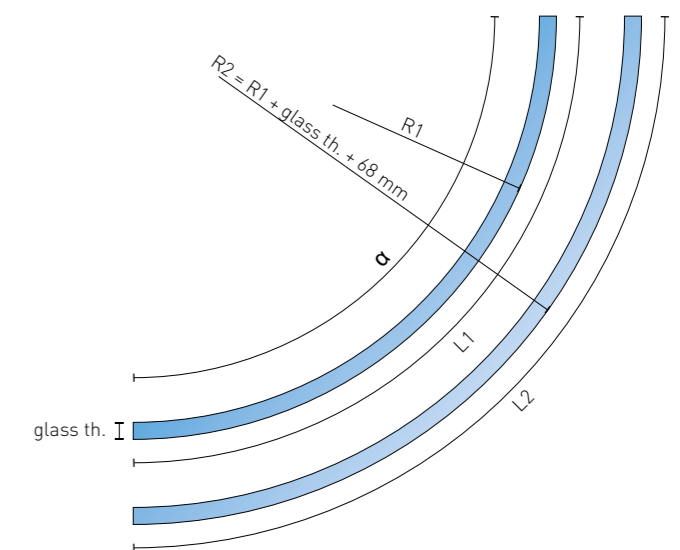

DIGITAL BLINDINGS

Like our other systems, the arched partition can be equipped with a digital PDLC blind, which **turns a clear wall into a milky one** at the touch of a button.



CURVED DOUBLE GLAZED

You can choose simply glazed MICRA I system or also MICRA II double glazing with soundproofing up to 45 dB and in a standard partition width of 100 mm.



Headquarters:

LIKO-S, a.s.
U Splavu 1419
684 01 Slavkov u Brna
Czech Republic

+420 5 44 22 11 11 | info@liko-s.com

www.liko-s.cz

Become our fan and be part of the story...



FACEBOOK



YOUTUBE



LINKEDIN